

# RIS Hi-Pave

The fastest and most flexible solution for road assessment surveys

**IDS Ingegneria Dei Sistemi S.p.A.**  
GeoRadar Division, Via Enrica Calabresi 24, 56121 Pisa (PI) Italy  
Tel. +39 050 31241 Fax +39 050 3124201  
georadarsales@idscorporation.com

**IDS Brasil Engenharia de Sistemas Ltda.**  
Rua Haddock Lobo, 1.307, 5º Andar, sala 51, Cerqueira César,  
Cep 01414-003 São Paulo-SP, Brazil  
Tel. +55 11 3060 9364 Fax +55 11 3896 1951  
idsbr@idscorporation.com

**IDS North America Ltd.**  
418 Sherbrooke Street East, Montreal, Quebec H2L 1J6, Canada  
Tel. +1 514 789-0082 Fax +1 514 398-0527  
idsna@idscorporation.com

**IDSNA, Inc.**  
15000 W 6th Ave., Suite 104, Golden, CO 80401, USA  
Phone: +1 303 232 3047 Fax: +1 720 519 1087  
idsna@idscorporation.com

**IDS Australasia Pty Ltd, Perth**  
Unit 8, 3 La Fayette Boulevard, Bibra Lake, Western Australia, Australia 6163  
Tel: +61 8 9418 8719 Fax: +61 7 320 55536  
idsau@idscorporation.com

**IDS Australasia Pty Ltd.**  
Unit 5, 3-5 Hinkler Court, Brendale, Queensland, Australia, 4500  
Tel. +61 7 3205 5524 Fax 61 7 3205 5536  
idsau@idscorporation.com



PROVIDING A COMPLETE ASSESSMENT OF ROAD CONDITIONS AT UNSURPASSED SPEED WITH A DEDICATED ARRAY OF MULTI-FREQUENCY ANTENNAS

## RIS Hi-Pave

RIS Hi-Pave is a ground penetrating radar solution designed for high speed road and/or runway assessment surveys. The system is able to operate with several antennas at the same time providing a complete assessment of conditions, including:

- Pavement thickness measurement.
- Surface, base and sub-base road course assessment.
- Detection of cavities, voids and delamination.
- Detection of subsurface water saturated areas.
- Airport runway condition assessment.

## RIS Hi-Pave Benefits

- **Pavement status evaluation** for new road construction (comparing completed pavement, grade and sub grade against design specifications).
- **Periodical status monitoring** of road and runway conditions for preventive maintenance.
- **High-speed** GPR solution and semi-automatic layer detection software tools, minimizing survey and processing time.
- **Flexible solution** that can integrate up to 8 GPR antennas.

## RIS Hi-Pave Features


- **Horn Antennas:** Hi-Pave is equipped with air launched horn antennas that can be used without contact with the surface.
- **Speed:** Hi-Pave is the fastest ground penetrating radar for road evaluation. It can reach up to 260 Km/h with a single antenna configuration and 10 cm data sampling or 130 km/h with a dual antenna configuration and 10 cm data sampling.
- **Semi-automatic procedure for layer recognition:** The post processing software uses a semi-automatic procedure to collect information of road subsurface layers.
- **Modular:** Hi-Pave can operate with up to 8 antennas in a chain connection using the same control unit.



Dual horn antenna configuration




RIS Hi-Pave with high and medium frequency antennas

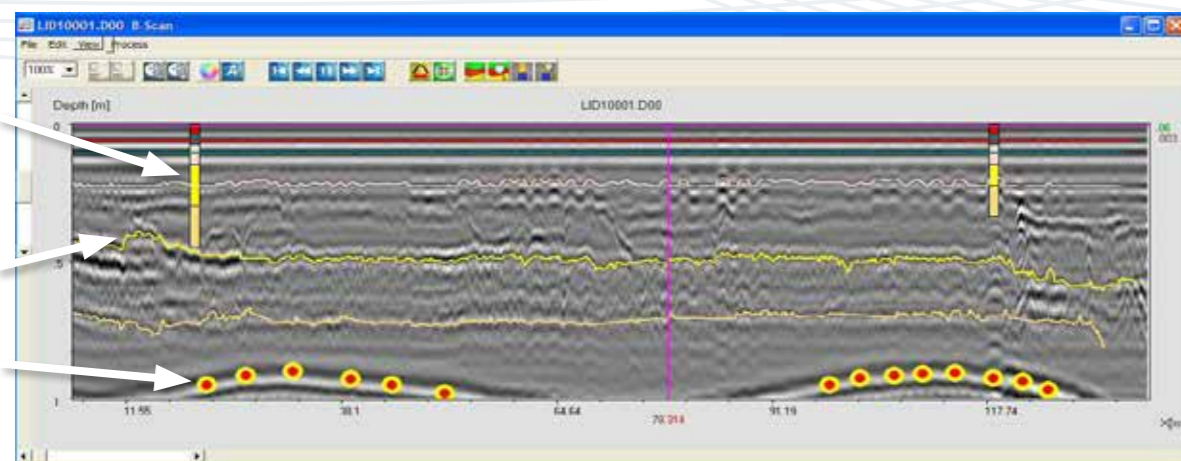

GRED HD: subsurface layer extraction

## RIS Hi-Pave Configuration

RIS Hi-Pave is a modular system which can be tailored to meet different requirements. The basic RIS Hi-Pave configuration consists of a single 1GHz or 2GHz horn antenna and a DAD FastWave radar control unit. A 600MHz antenna can be added to this to provide a complete road or runway evaluation, including grade and subgrade evaluations as well as the pavement. The number of antennas can be doubled to provide a wider survey path and hence require fewer scans to be performed and the system can also be used with a second control unit to provide a denser sampling rate to allow more accurate scans or scans to be performed at a higher speed.

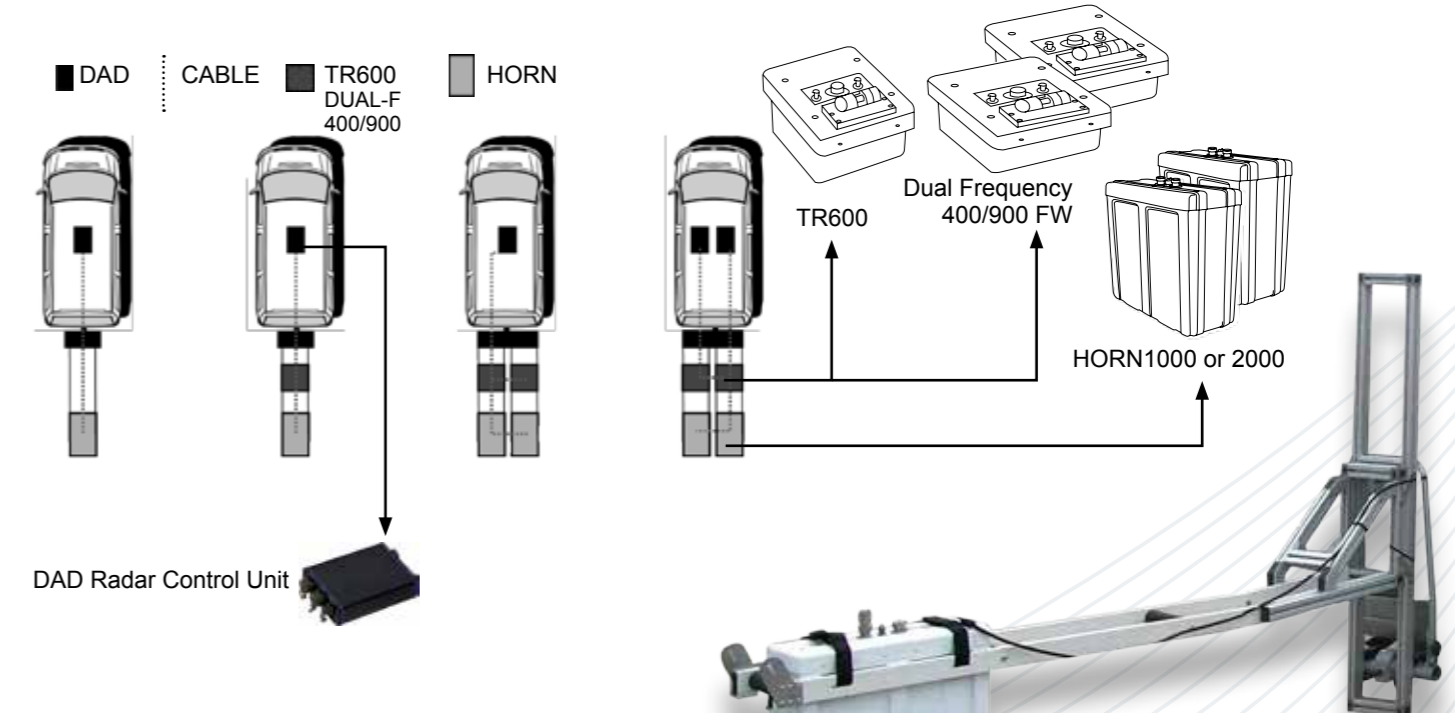

SYSTEM SPECIFICATIONS	
RECOMMENDED LAPTOP	Panasonic CF-19 Tough-Book
MAX. ACQUISITION SPEED (@ STD. SCAN INTERVAL)	260 kph (150 mph)@1 antenna
POWER CONSUMPTION	13.3 W @ 1 antenna
POSITIONING	Survey wheel and/or GPS
NUMBER OF CONTROL UNIT	Depending on the configuration
SCAN RATE PER CHANNEL: (@512 SAMPLES/SCAN)	724 scans/sec. @ 1 antenna
SCAN INTERVAL	10 scans/m
POWER SUPPLY	SLA Battery 12VDC 12 AH
ANTENNA SPECIFICATIONS	
ENVIRONMENTAL	IP65
ANTENNA FOOTPRINT	51 X 22 CM
NUMBER OF HARDWARE CHANNELS	from 1 to 8
ANTENNA CENTER FREQUENCIES	1GHz or 2GHz
ANTENNA POLARIZATION	Horizontal (HH)
ANTENNA TYPE	Air launched
CERTIFICATION	EC, FCC, IC

SOFTWARE SPECIFICATIONS	
GRED HD BASIC GRED HD 3D	<ul style="list-style-type: none"> <li>• Tomographic map view (C-Scan) including radar scan fusion</li> <li>• 3D data visualization</li> <li>• Advanced targeting using radarscan and tomographic view</li> <li>• Radarscan viewer, filter and advanced filtering macros, multiple radar scan viewer</li> <li>• Layer picking for automatic analysis of sub-layers</li> <li>• GPS and map track viewer including X, Y and Z axis and digital map importation</li> <li>• Video handling (option)</li> </ul>